



ASX ANNOUNCEMENT

21 January 2026

FIRST DRILL HOLE COMPLETED AT TORO CENTRAL

KEY HIGHLIGHTS

- First diamond drill hole TMT-TC-DDH-001 at Toro Central completed to 705.60 meters, intersecting altered volcanic and volcaniclastic units with visually observed sulphides over 568.5m (98.0m-666.5m), verifying the chargeability anomaly drill target.
- Second drill hole underway 400m to the North of TMT-TC-DDH-001, testing continuity and extension of Ag, Cu and Zn mineralisation intersected in historical drilling.
- MT/IP survey at Tambo South resumed, with completion expected within a fortnight.
- Advanced 3D geophysical interpretation ongoing from MT/IP survey at Toro South, with results expected shortly to refine copper porphyry target.

Belararox Limited (ASX: BRX) (“Belararox” or “the Company”) is pleased to provide the following update on exploration drilling and other exploration work currently ongoing at the Company’s TMT Project in Argentina (“TMT”)

Drilling of shallow epithermal targets is progressing well at the TMT Project in Argentina following a review of the initial MT/IP geophysical data (refer to BRX announcement 10/12/2025). The epithermal modelled system is interpreted to extend continuously from Toro Central into Toro South, with the second drill hole underway to test a potential material upside for the TMT Project.

Executive Director Chris Gale commented: “The TMT project’s first exploration hole has been completed as planned, reaching the target depth and intersecting the anticipated geological target, reinforcing confidence in BRX exploration objectives. Core recovery was strong, and preliminary observations indicate encouraging sulphide minerals and alteration consistent with the exploration model. While detailed assays and further analysis are still pending, the visual indicators and structural continuity suggest the hole has successfully tested the intended target. Overall, the completion of this hole marks a positive step forward for the BRX drilling campaign. We are looking forward to commencing the second hole this week.”

Exploration Manager Chris Blaser commented: “Drilling is progressing well with the first diamond hole completed. The hole intersected the targeted altered volcanic and volcaniclastic units interpreted to be favourable host rocks for sulphide mineralisation as seen in historical drilling, consistent with the IP chargeability anomaly and the Company’s exploration model.”

Toro Central

The Company's first drill hole TMT-TC-DDH-001 has been successfully completed to a depth of 705.60 meters, targeting an IP chargeability anomaly identified from the recently completed combined Magnetotellurics (MT) and Induced Polarisation (IP) geophysical survey at the Toro South and Central targets. The chargeability anomaly aligns closely with historical drill intersections, including **44m @ 55.7ppm Ag, 0.22% Cu, 0.71% Zn, 0.1ppm Au** and from 286m in hole ARRLSDD0001¹. This strong geophysical target has not been adequately drill-tested to date and now represents a coherent shallow and broad epithermal target from Toro Central to Toro South, extending over 1400m (*Figure 1*)².

TMT-TC-DDH-001 intersected the targeted altered volcanic and volcanioclastic units containing visually observed sulphide minerals within the interval from 98.0m to 666.5m (568.5m), which host the historical mineralisation. Sulphides observed occur as disseminations and veinlets and comprise predominantly iron sulphides (pyrite). Locally, minor fine-grained 'dark sulphides' are present and are interpreted by the Company's geological team to potentially include Cu, Ag and Zn-bearing phases on the basis of visual characteristics. Mineral identification is preliminary and qualitative only. No quantitative estimates of grade or metal content are reported.

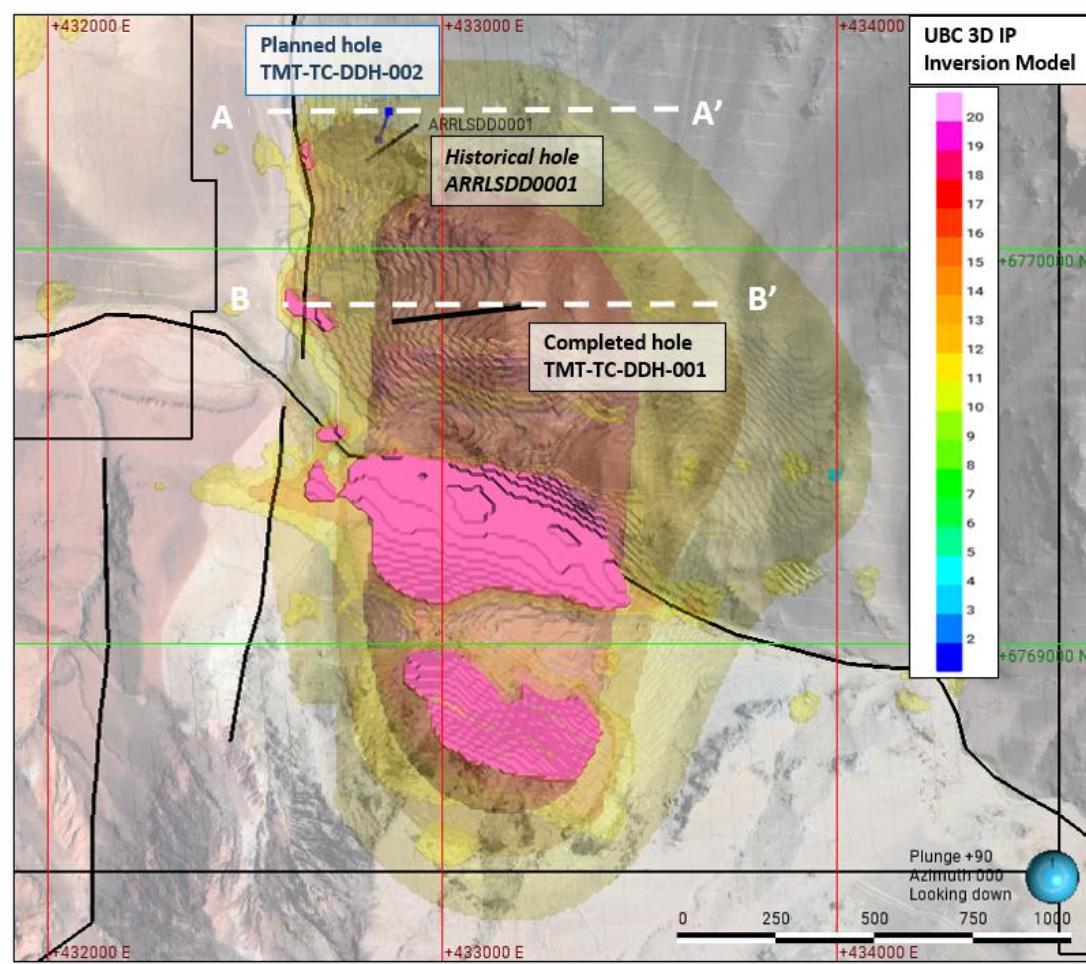


Figure 1: Plan view of the chargeability anomaly (UBC 3D IP Inversion Model, only voxels > 10mrad are shown here), extending over 2000m from north to south. IP inversion models are used as an exploration targeting tool only. Cross sections A-A' and B-B' are shown in following figures.

¹ Refer to BRX announcement from 17/07/2023 - TMT project in Argentina Significant Zinc Mineralisation (266m @ m 0.76% Zn) verified and reported under the JORC (2012) Code

² Refer to BRX announcement dated 10/12/2025 - REFINED EXPLORATION STRATEGY AT TORO TMT PROJECT, ARGENTINA

The observed sulphide assemblage and alteration style are consistent with the modelled IP chargeability and the Company's exploration model (Figure 2).

Visual observations are qualitative only and are not indicative of assay results or economic mineralisation. Laboratory assay results are required to determine the grade and metal content of any mineralisation; results will be reported once analyses are complete (expected by the end of February 2026).

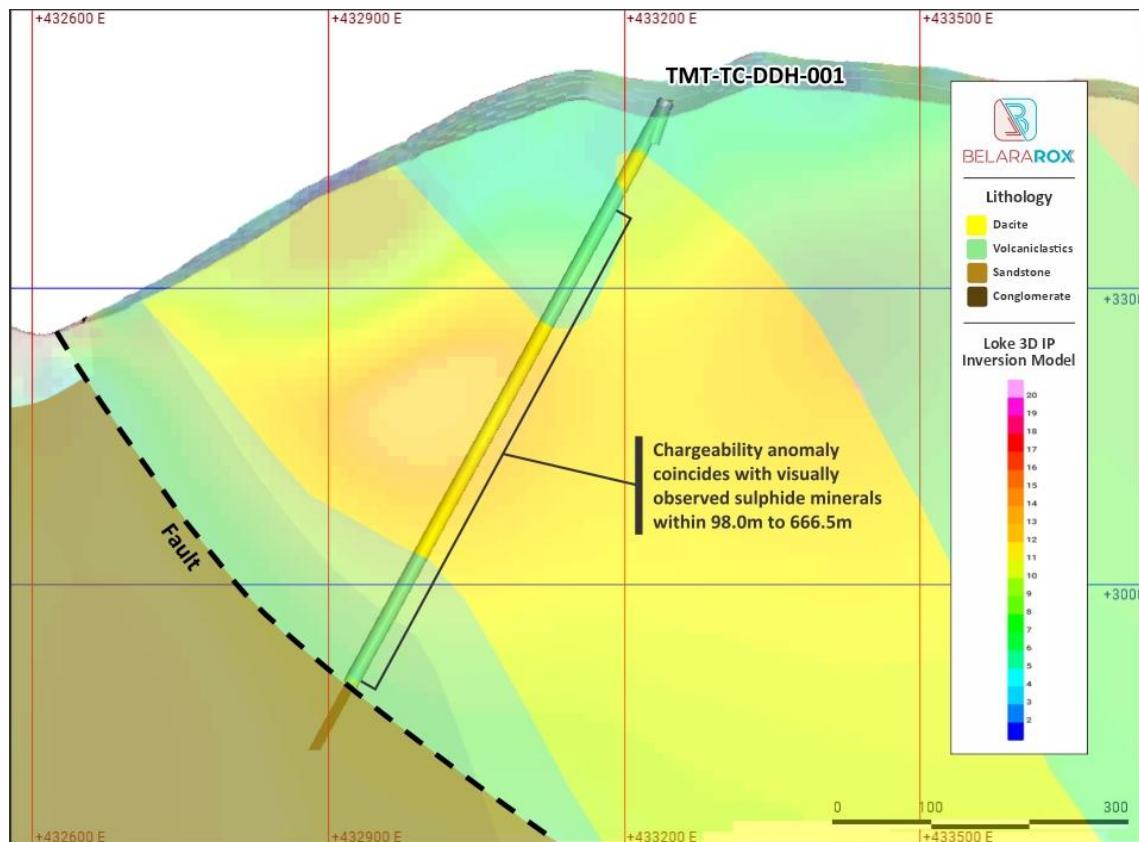


Figure 2: Section line B-B' with interpreted geology and LOKE 3D IP inversion model (refer to Figure 1 for section location in plan view and Table 1 for more details on 3D IP inversion modelling). IP inversion models are used as an exploration targeting tool only.

The second drill hole TMT-TC-DDH-002 at Toro Central is planned to confirm and extend mineralisation identified in historical diamond drill hole ARRLSDD0001, which included³:

- 266m @ 0.76% Zn, 14.6ppm Ag, 0.05ppm Au, 0.04% Cu and 0.09% Pb from 56m, including:
- 44m @ 55.7ppm Ag, 0.22% Cu, 0.71% Zn, 0.1ppm Au and 0.04% Pb from 286m

The mineralisation from historical drilling and more recent surface sampling is characterised by Au-Ag-Cu-Pb-Zn-bearing (intermediate-sulfidation) mineralisation, appears to be structurally controlled and potentially linked to a porphyry centre⁴.

TMT-TC-DDH-002 is designed to confirm and extend the interpreted mineralised interval and to test for strike continuity.

³ Refer to BRX announcement dated 17/07/2023 - TMT project in Argentina Significant Zinc Mineralisation (266m @m 0.76% Zn) verified and reported under the JORC (2012) Code

⁴ Refer to BRX's ASX release dated 21/02/2024 - TMT Project - Toro Surface Assay Results and Geology Strengthen the Interpretation of a Porphyry Mineralisation / Epithermal Mineralisation

Current drilling is focused on epithermal-style mineralisation, while ongoing geophysical interpretation is aimed at refining deeper copper porphyry targets.

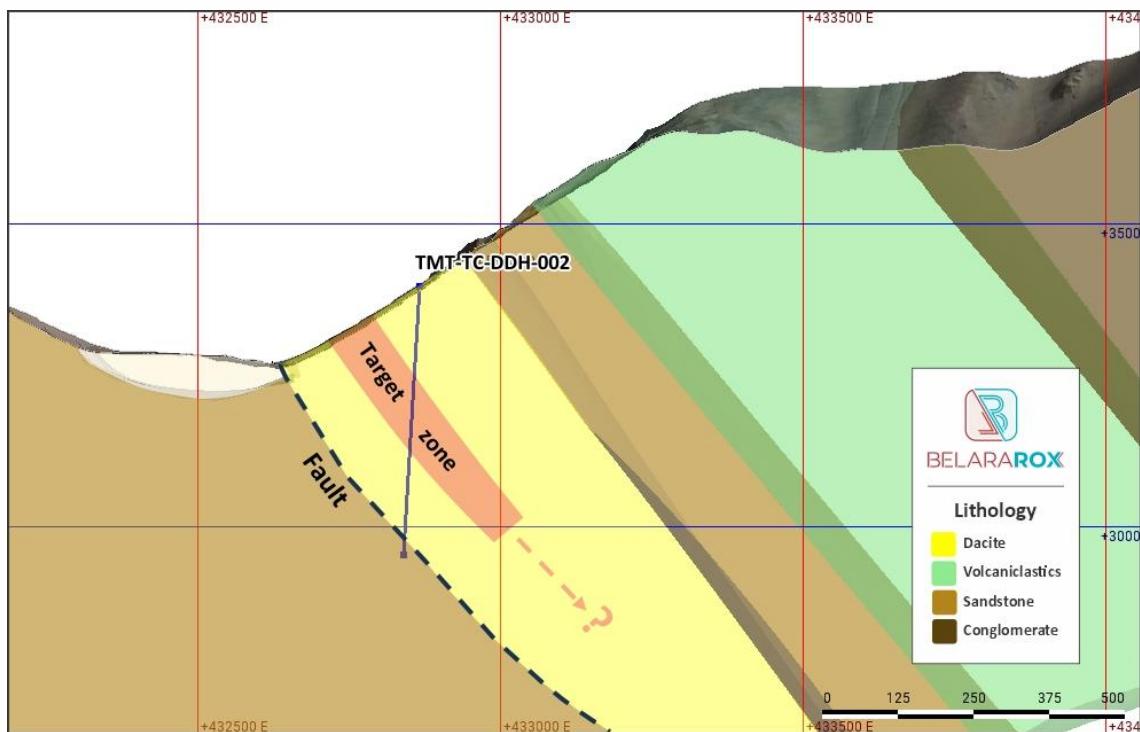


Figure 3: Section line A-A' with interpreted geology (refer to Figure 1 for section location in plan view). Note the pink target zone indicating potential continuation from mineralisation intersected in historical drilling and coinciding with a chargeability anomaly (refer to BRX announcement from 10/12/2025).

Tambo South

The combined MT/IP survey at Tambo South has resumed and is expected to be completed within a fortnight. The survey is designed to refine targeting of deeper and laterally offset zones relative to existing drilling and inform the ongoing exploration program at this target.

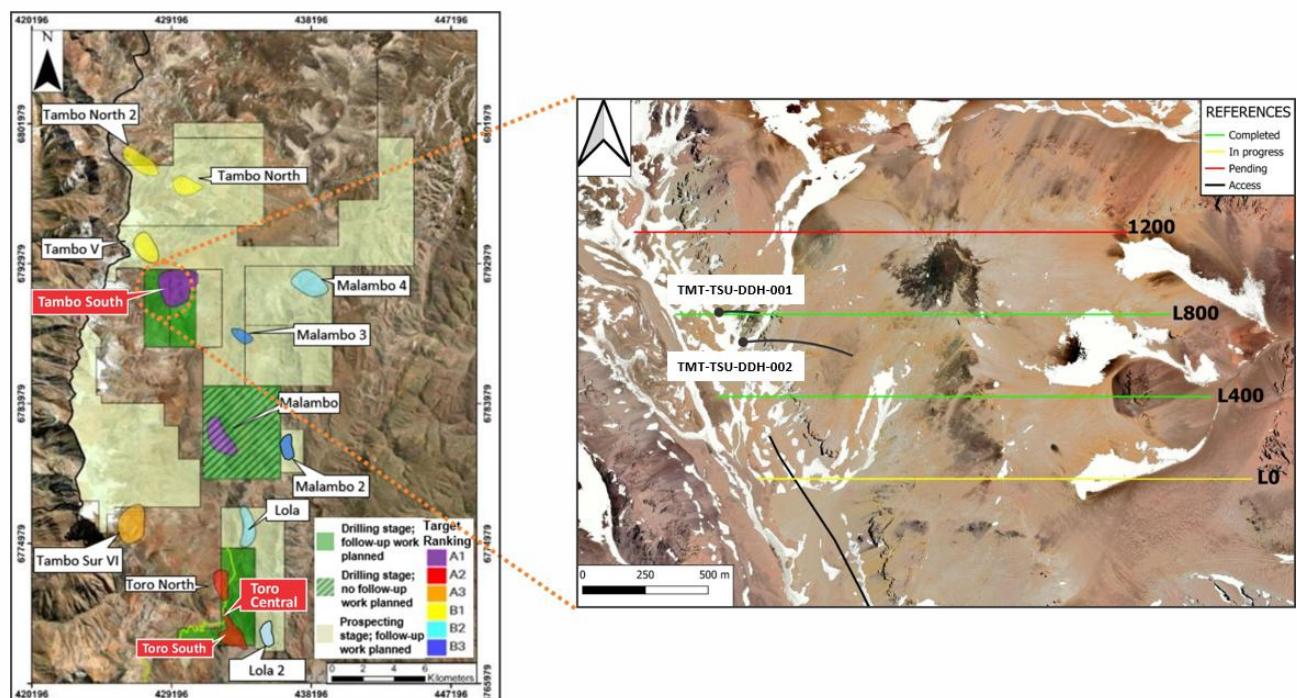


Figure 4. Right image is overview map of the TMT project and targets from ASTER and SENTINEL 2 interpretation, (for more information see BRX ASX Release 18 May 2023). Left image shows status of the MT/IP survey at Tambo South and drill holes TMT-TSU-DDH-001 and TMT-TSU-DDH-002.



TMT - Further Work

- 3D geophysical data interpretation and modelling are ongoing for Toro Central and Toro South, allowing further refinement of deeper copper porphyry targets.
- Geophysical MT/IP surveys are underway at the Tambo South target.
- Assays expected end of February 2026.

Further updates will be provided as material results become available.

This announcement has been authorised for release by the Board of Belararox.

SHAREHOLDER ENQUIRIES	MEDIA ENQUIRIES	GENERAL ENQUIRIES
Chris Gale Executive Director Belararox Limited chris.gale@belararox.com.au	Paul Berson Corporate Storytime paul@corporatestorytime.com	Belararox Limited www.belararox.com.au info@belararox.com.au

COMPETENT PERSON STATEMENT (TMT PROJECT ARGENTINA)

The information in this announcement to which this statement is attached relates to Exploration Results and is based on information compiled by Mr Chris Blaser. Mr Blaser is the Exploration Manager of Belararox Ltd and is a Competent Person who is a Member of the Australasian Institute of Mining and Metallurgy (AusIMM) and a Member of the Australian Institute of Geoscientists (AIG). Mr Blaser has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration, and to the exploration techniques being used to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Blaser has consented to the inclusion in this announcement of the matters based on his information, in the form and context in which they appear.

The Company confirms that it is not aware of any new information or data that materially affects the information included in prior market announcements and, in the case of exploration results, that all material assumptions and technical parameters underpinning the results in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

ABOUT BELARAROX LIMITED (ASX: BRX)

Belararox is a mineral explorer focused on securing and developing resources to meet the surge in demand from the technology, battery, and renewable energy markets. Our projects currently include the potential for copper, gold, silver and zinc resources.

The Company's portfolio includes the TMT Project in Argentina, targeting copper, gold and other metals, a recent acquisition in Botswana's Kalahari Copper Belt, the Belara project in New South Wales, focused on zinc and copper, and the Bullabulling project (under Option to Minerals 260) in Western Australia, targeting gold.



Situated within Argentina's San Juan Province, the Toro-Malambo-Tambo (TMT) project occupies an unexplored area between the prolifically mineralised El Indio and Maricunga Metallogenic Belts.

Belararox has already successfully identified numerous promising targets within the TMT project. These targets will undergo thorough exploration as part of an extensive program led by an experienced Belararox team currently established in Argentina.





APPENDIX A: JORC (2012) CODE TABLE 1

Criteria	JORC Code Explanation	Commentary
<i>Sampling techniques</i>	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representativity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done; this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold with inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant the disclosure of detailed information. 	<ul style="list-style-type: none"> Visual observations of core and hand specimens are qualitative only and are not indicative of assay results or economic mineralisation. Diamond drilling was undertaken to obtain core samples. Samples used for geochronological analysis are detailed in Table 1 within the body of the announcement.
<i>Drilling techniques</i>	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other types, whether the core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> PQ, HQ and NQ diamond drill core. Triple-tube wire line standard equipment. Surveys used DeviShot tool initially, then converted to Gyro (TruGyro) tool. Core is oriented using spear technique.
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures are taken to maximise sample recovery and ensure the representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> For diamond drilling recovery is recorded for every run. In general core recovery is in excess of 99%. There is insufficient core loss to assess or consider a bias.
<i>Logging</i>	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> At selected and systematic locations during the Anaconda geological mapping, descriptions of lithology, alteration, mineralisation and other features were systematically recorded in the field and encoded into an Excel sheet for future reference. Samples are being collected in a systematic and selective fashion with descriptions of lithology, alteration, mineralisation and other features systematically recorded in the field and encoded into an Excel sheet for



Sub-sampling techniques and sample preparation

- If core, whether cut or sawn and whether quarter, half or all core taken.
- If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.
- For all sample types, the nature, quality and appropriateness of the sample preparation technique.
- Quality control procedures adopted for all sub-sampling stages to maximise the representativity of samples.
- Measures are taken to ensure that the sampling is representative of the in-situ material collected, including, for instance, results for field duplicate/second-half sampling.
- Whether sample sizes are appropriate to the grain size of the sampled material.

Quality of assay data and

- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or

future reference.

- Visual estimates of mineral abundance based on the observations of the Company geologists should never be considered a proxy or substitute for laboratory concentrations where grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations. All visual estimates have been made by experienced Geologists using standardized abundance charts.
- At the rig, core is photographed, initial geotechnical logging is performed, and the core is oriented.
- Core is photographed, logged, cut and sampled by project personnel at a core logging area at the camp.
- Geological and geotechnical logging is at a level of detail to support future Mineral Resource Estimation and other mining and metallurgical studies.
- Core is sampled continuously down the hole.
- Sample lengths are 4 metres in zones of little geological interest and 2 metres in zones of higher geological interest.
- Where visual estimates of mineralization exceed 20m at > 0.1 volume-% Cu (or CuEq) trigger the collection of samples every 2m.
- 2m samples consist of half-core.
- 4m samples consist of quarter core.
- In cutting and sampling of half-core and quarter-core, the 0° orientation line is used to cut the core to avoid selective sample bias.
- Sample material for age-dating analysis comprised 4 samples from intrusive rocks (refer to ASX announcement on the 11 November 2025).
- Geochronological analysis was performed by the Curtin University in Perth for the two samples at Toro and the CODES Analytical Laboratories in Tasmania for the two samples from Tambo South.
- The analysis was completed using LA-ICPMS (laser ablation inductively coupled plasma mass spectrometry) on zircon grains from the intrusive rocks
- Ages were determined from the relative decay of uranium to lead in zircon
- Curtin and CODES utilised industry QAQC when conducting age-dating analysis including the use of standards, all of which returned within acceptable threshold values.
- In each sample a coherent population of young zircons was identified and are interpreted to be the magmatic age of the samples
- A weighted mean age and weighted uncertainty was then calculated for each sample using the remaining analyses.
- ALS Patagonia has been selected to undertake analyses using the following:



<i>laboratory tests</i>	<p>total.</p> <ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis include instrument make and model, reading times, calibration factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> ME-MS61 (Four acid digestion followed by ICP-MS measurement) Au-AA23 (Au by fire assay and AAS) HYP-PKG (TerraSpec® 4 HR scanning and aiSIRIS™) <ul style="list-style-type: none"> Quality control procedures are as follows: <ul style="list-style-type: none"> Blanks every 50 samples Standards every 50 samples Duplicates 3 per 100 samples Acceptable levels of accuracy and precision have been established to date in the soils, talus and rock chip samples.
<i>Verification of sampling and assaying</i>		<ul style="list-style-type: none"> Procedures for sampling and assaying are well documented. This includes the verification of significant intersections by the geological team (both the original logger and others as available.)
<i>Location of data points</i>	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, and data storage (physical and electronic) protocols. Discuss any adjustments to assay data. <ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in MineralResource estimation. Specification of the grid system used. Quality and adequacy of topographic control. <ul style="list-style-type: none"> GPS locations for the Anaconda geological mapping activities are being captured by handheld GPS units in the field and later encoded into an Excel spreadsheet containing the surface samples with descriptions of lithology, alteration, mineralisation and other features. GPS sample locations are being captured by handheld GPS units in the field and later encoded into an Excel spreadsheet containing the surface samples with descriptions of lithology, alteration, mineralisation and other features. GPS co-ordinates were recorded in Eastings and Northings for WGS84 Zone 19S The spectral data discussed in previous ASX releases includes two (2) different multispectral spaceborne datasets for the location of the twelve (12) targets: <ul style="list-style-type: none"> [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer ("ASTER"); and [ii] Sentinel-2. The data is initially recorded by satellites and the processing and interpretation were delivered in the coordinate system of WGS84 Zone 19S. The survey control is appropriate for the interpretation of the processed ASTER and Sentinel-2 to deliver regional targets as surface expressions that are likely to represent surface expressions of high-sulphidation epithermal and/or porphyry-style mineral systems. Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping have used hand-held GPS to assist with the physical location of the collected samples. Drillholes are located with handheld GPS and the alignment of the rig setup uses a handheld compass. Topographic control is via the GPS and the satellite 5m DEM. 	



<p><i>Data spacing and distribution</i></p>	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • The surface sample locations that are in the process of being collected vary from clusters at outcrops to surface samples aiming to cover a broad area, at a spacing ~200m apart to cover and identify high-sulphidation epithermal and/or porphyry mineral systems. • The data discussed in the ASX releases deals with two (2) different multispectral spaceborne datasets: <ul style="list-style-type: none"> ◦ [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer (“ASTER”); and ◦ [ii] Sentinel-2. • The data is initially recorded by satellites and the processing and interpretation were delivered in the coordinate system of WGS84 Zone 19S. • Multispectral image sensors simultaneously capture image data within multiple wavelength ranges (bands) across the electromagnetic spectrum. Each band is commonly described by the band number and the band wavelength centre position. • The ASTER processed datasets of a resolution of 15m for Visible Near Infrared (“VNIR”) or 30m for Short Wavelength Infrared (“SWIR”). • The Sentinel-2 resolution ranges from 10m to 60m dependent on bandwidth. • The survey control and data resolution are appropriate for the interpretation of the processed ASTER and Sentinel-2 to deliver regional targets as surface expressions that are likely to represent surface expressions of high-sulfidation epithermal and/or porphyry-style mineral systems. • Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping have used handheld GPS to assist with the physical location of the collected samples. Surface samples collected included Outcrop/Rock Chip, Talus, and Float Samples.
<p><i>Orientation of data in relation to geological structure</i></p>	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • The surface sample locations that are in the process of being collected vary from clusters at outcrops to surface samples aiming to cover a broad area, at a spacing ~200m apart to cover and identify high-sulphidation epithermal and/or porphyry mineral systems. • Hyperspectral data discussed in the previous ASX releases deals with two (2) different multispectral spaceborne datasets: <ul style="list-style-type: none"> ◦ [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer (“ASTER”); and ◦ [ii] Sentinel-2. • Multispectral image sensors simultaneously capture image data within multiple wavelength ranges (bands) across the electromagnetic spectrum. Each band is commonly described by the band number and the band wavelength centre position.



	<ul style="list-style-type: none">• The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS (2008)], crustal lineaments [Chernicoff, et. al, (2002)]], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geología y Minera (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.• Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geology associated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation.• Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping, using handheld GPS to assist with the physical location of the collected samples. Surface samples collected included Outcrop/Rock Chip, Talus, and Float Samples, these samples are selective for outcrop or spatially distributed across the ground surface for Talus and Float samples to generate a first-pass geochemical understanding of the exposed geology.
<i>Sample security</i>	<ul style="list-style-type: none">• The measures taken to ensure sample security.• Samples are bagged, numbered, zip tied and transported with dispatch information by project staff directly to the office/warehouse in San Juan. Routinely (fortnightly) samples are then transported to Mendoza ALS preparation lab.
<i>Audits or reviews</i>	<ul style="list-style-type: none">• The results of any audits or reviews of sampling techniques and data.• Sampling techniques have been developed in consultation with the Competent Person.• No audits or reviews have been undertaken to date.



SECTION 2 REPORTING OF EXPLORATION RESULTS

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary																																																																																				
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> Type, reference name/number, location and ownership, including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national parks and environmental settings. The security of the tenure held at the time of reporting and any known impediments to obtaining a license to operate in the area. 	<ul style="list-style-type: none"> The mineral tenures are located in the province of San Juan, Argentina and details of the Terms Sheet for the Acquisition of the Fomo Ventures No1 Pty Ltd Argentinean mineral tenures are presented in Belarox Limited (ASX: BRX) ASX Release "Belarox secures rights to acquire Project in Argentina" dated 03-Jan-2023 https://cdn-api.markitdigital.com/apiman-gateway/ASX/asx-research/1.0/file/2924-02618068-6A1130657?access_token=83ff96335c2d45a094df02a206a39ff4 The details of the minerals tenures that make up the TMT Project are as follows: 																																																																																				
<table border="1"> <thead> <tr> <th data-bbox="428 549 676 576">Tenure Name</th><th data-bbox="676 549 923 576">Tenement</th><th data-bbox="923 549 1230 576">Tenure Type</th><th data-bbox="1230 549 1522 576">Area (Ha)</th><th data-bbox="1522 549 1814 576">Grant Date</th><th data-bbox="1814 549 2149 576">Expiry Date</th></tr> </thead> <tbody> <tr> <td data-bbox="428 576 676 603">LOLA</td><td data-bbox="676 576 923 603">1124-181-M-2016</td><td data-bbox="923 576 1230 603">Discovery claim</td><td data-bbox="1230 576 1522 603">2,367.0</td><td data-bbox="1522 576 1814 603">29 Dec 2016</td><td data-bbox="1814 576 2149 603">Not Applicable</td></tr> <tr> <td data-bbox="428 603 676 630">MALAMBO</td><td data-bbox="676 603 923 630">425-101-2001</td><td data-bbox="923 603 1230 630">Discovery claim</td><td data-bbox="1230 603 1522 630">3,004.0</td><td data-bbox="1522 603 1814 630">13 Aug 2019</td><td data-bbox="1814 603 2149 630">Not Applicable</td></tr> <tr> <td data-bbox="428 630 676 657">MALAMBO 2</td><td data-bbox="676 630 923 657">1124-485-M-2019</td><td data-bbox="923 630 1230 657">Discovery claim</td><td data-bbox="1230 630 1522 657">414.1</td><td data-bbox="1522 630 1814 657">24 Jun 2021</td><td data-bbox="1814 630 2149 657">Not Applicable</td></tr> <tr> <td data-bbox="428 657 676 684">MALAMBO 3</td><td data-bbox="676 657 923 684">1124-074-2022</td><td data-bbox="923 657 1230 684">Discovery claim</td><td data-bbox="1230 657 1522 684">2,208.0</td><td data-bbox="1522 657 1814 684">Not Granted</td><td data-bbox="1814 657 2149 684">Not Applicable</td></tr> <tr> <td data-bbox="428 684 676 711">MALAMBO 4</td><td data-bbox="676 684 923 711">1124-073-2022</td><td data-bbox="923 684 1230 711">Discovery claim</td><td data-bbox="1230 684 1522 711">2,105.0</td><td data-bbox="1522 684 1814 711">27 Nov 2023</td><td data-bbox="1814 684 2149 711">Not Applicable</td></tr> <tr> <td data-bbox="428 711 676 738">TAMBO SUR</td><td data-bbox="676 711 923 738">1124-188-R-2007</td><td data-bbox="923 711 1230 738">Discovery claim</td><td data-bbox="1230 711 1522 738">4,451.0</td><td data-bbox="1522 711 1814 738">11 Jul 2019</td><td data-bbox="1814 711 2149 738">Not Applicable</td></tr> <tr> <td data-bbox="428 738 676 765">TAMBO SUR I</td><td data-bbox="676 738 923 765">1124-421-2020</td><td data-bbox="923 738 1230 765">Discovery claim</td><td data-bbox="1230 738 1522 765">833.0</td><td data-bbox="1522 738 1814 765">9 Nov 2021</td><td data-bbox="1814 738 2149 765">Not Applicable</td></tr> <tr> <td data-bbox="428 765 676 794">TAMBO SUR II</td><td data-bbox="676 765 923 794">1124-420-2020</td><td data-bbox="923 765 1230 794">Discovery claim</td><td data-bbox="1230 765 1522 794">833.0</td><td data-bbox="1522 765 1814 794">13 Dec 2021</td><td data-bbox="1814 765 2149 794">Not Applicable</td></tr> <tr> <td data-bbox="428 794 676 820">TAMBO SUR III</td><td data-bbox="676 794 923 820">1124-422-2020</td><td data-bbox="923 794 1230 820">Discovery claim</td><td data-bbox="1230 794 1522 820">833.0</td><td data-bbox="1522 794 1814 820">13 Jul 2022</td><td data-bbox="1814 794 2149 820">Not Applicable</td></tr> <tr> <td data-bbox="428 820 676 847">TAMBO SUR IV</td><td data-bbox="676 820 923 847">1124-299-2021</td><td data-bbox="923 820 1230 847">Discovery claim</td><td data-bbox="1230 820 1522 847">584.0</td><td data-bbox="1522 820 1814 847">3 Dec 2021</td><td data-bbox="1814 820 2149 847">Not Applicable</td></tr> <tr> <td data-bbox="428 847 676 874">TAMBO SUR V</td><td data-bbox="676 847 923 874">1124-577-2021</td><td data-bbox="923 847 1230 874">Cateo</td><td data-bbox="1230 847 1522 874">7,500.0</td><td data-bbox="1522 847 1814 874">Not Granted</td><td data-bbox="1814 847 2149 874">Application</td></tr> <tr> <td data-bbox="428 874 676 901">TAMBO SUR VI</td><td data-bbox="676 874 923 901">1124-579-2021</td><td data-bbox="923 874 1230 901">Cateo</td><td data-bbox="1230 874 1522 901">5,457.0</td><td data-bbox="1522 874 1814 901">5 Nov 2024</td><td data-bbox="1814 874 2149 901">16-Feb-2028</td></tr> <tr> <td data-bbox="428 901 676 928">TORO</td><td data-bbox="676 901 923 928">1124-528-M-2011</td><td data-bbox="923 901 1230 928">Discovery claim</td><td data-bbox="1230 901 1522 928">1,685.0</td><td data-bbox="1522 901 1814 928">2 Jul 2013</td><td data-bbox="1814 901 2149 928">Not Applicable</td></tr> </tbody> </table>	Tenure Name	Tenement	Tenure Type	Area (Ha)	Grant Date	Expiry Date	LOLA	1124-181-M-2016	Discovery claim	2,367.0	29 Dec 2016	Not Applicable	MALAMBO	425-101-2001	Discovery claim	3,004.0	13 Aug 2019	Not Applicable	MALAMBO 2	1124-485-M-2019	Discovery claim	414.1	24 Jun 2021	Not Applicable	MALAMBO 3	1124-074-2022	Discovery claim	2,208.0	Not Granted	Not Applicable	MALAMBO 4	1124-073-2022	Discovery claim	2,105.0	27 Nov 2023	Not Applicable	TAMBO SUR	1124-188-R-2007	Discovery claim	4,451.0	11 Jul 2019	Not Applicable	TAMBO SUR I	1124-421-2020	Discovery claim	833.0	9 Nov 2021	Not Applicable	TAMBO SUR II	1124-420-2020	Discovery claim	833.0	13 Dec 2021	Not Applicable	TAMBO SUR III	1124-422-2020	Discovery claim	833.0	13 Jul 2022	Not Applicable	TAMBO SUR IV	1124-299-2021	Discovery claim	584.0	3 Dec 2021	Not Applicable	TAMBO SUR V	1124-577-2021	Cateo	7,500.0	Not Granted	Application	TAMBO SUR VI	1124-579-2021	Cateo	5,457.0	5 Nov 2024	16-Feb-2028	TORO	1124-528-M-2011	Discovery claim	1,685.0	2 Jul 2013	Not Applicable	<p>Note 1: For a Discovery Claim, there is no expiration date. The mineral tenure is retained while the minimum investment plan is followed.</p>	
Tenure Name	Tenement	Tenure Type	Area (Ha)	Grant Date	Expiry Date																																																																																	
LOLA	1124-181-M-2016	Discovery claim	2,367.0	29 Dec 2016	Not Applicable																																																																																	
MALAMBO	425-101-2001	Discovery claim	3,004.0	13 Aug 2019	Not Applicable																																																																																	
MALAMBO 2	1124-485-M-2019	Discovery claim	414.1	24 Jun 2021	Not Applicable																																																																																	
MALAMBO 3	1124-074-2022	Discovery claim	2,208.0	Not Granted	Not Applicable																																																																																	
MALAMBO 4	1124-073-2022	Discovery claim	2,105.0	27 Nov 2023	Not Applicable																																																																																	
TAMBO SUR	1124-188-R-2007	Discovery claim	4,451.0	11 Jul 2019	Not Applicable																																																																																	
TAMBO SUR I	1124-421-2020	Discovery claim	833.0	9 Nov 2021	Not Applicable																																																																																	
TAMBO SUR II	1124-420-2020	Discovery claim	833.0	13 Dec 2021	Not Applicable																																																																																	
TAMBO SUR III	1124-422-2020	Discovery claim	833.0	13 Jul 2022	Not Applicable																																																																																	
TAMBO SUR IV	1124-299-2021	Discovery claim	584.0	3 Dec 2021	Not Applicable																																																																																	
TAMBO SUR V	1124-577-2021	Cateo	7,500.0	Not Granted	Application																																																																																	
TAMBO SUR VI	1124-579-2021	Cateo	5,457.0	5 Nov 2024	16-Feb-2028																																																																																	
TORO	1124-528-M-2011	Discovery claim	1,685.0	2 Jul 2013	Not Applicable																																																																																	
<p>Note 2: All mineral tenures are held by GWK S.A.</p>																																																																																						
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Historical exploration activities for the Toro (1124-528-M-11) tenure have been covered in the Belarox Limited (ASX:BRX) ASX Release dated 23rd Mar 2023 and titled 'Binding Agreement executed to acquire TMT Project in Argentina Significant Zinc Mineralisation (266m @ 0.76% Zn) reported in historical drilling.' . Note: the aforementioned ASX Release contains a 'Cautionary Statement', and the 'Exploration Results' are yet to be reported to the JORC (2012) Code. The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS 																																																																																				



<p>Geology</p> <ul style="list-style-type: none">Deposit type, geological setting and style of mineralisation.	<p>(2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geología y Minera (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.</p> <ul style="list-style-type: none">Fathom Geophysics (Core & Core, 2023) processed the ASTER and Sentinel-2 data for use in the Garwin (2023) study, and the processed data is included in images within this ASX Release.Fathom Geophysics processed the data reported Malambo Geophysics into MVI Amplitude, MVI Induced, MVI Remanent datasets. MVI Amplitude figures have been used in this announcement.Regional Geology: The TMT project is within or in proximity to a number of significant regional metallogenic belts of South America, (1) the Andean Metallogenic Belt, (2) the El Indio Metallogenic (Cu-Au) Belt, and (3) the Maricunga Metallogenic (Cu-Au) Belt.Toro (1124-528-M-11) tenure and Specific Geology (from historical reports): The identified rocks include the Valle del Cura Formation (Eocene), composed mainly of red conglomerates, sandstones, tuffs, andesites and pyroclastic ignimbrites. Some of these rocks outcrop on the surface, with tuffaceous breccias being intersected in historical drill holes. The sequence is intruded by subvolcanic bodies pseudo concordant to stratification, "Intrusivos Miocenos", the source of the hydrothermal alteration-mineralization in the area. Rhyodacitic - dacitic rocks, altered by advanced argillic and phyllitic alteration dominate the area. Silicification, argillic, and propylitic alteration are present in the Toro project tenure. Stockworks and at least one (1) Breccia Pipe have been identified during historical exploration activities at the Toro project.The Targets' interpreted from the Satellite Imagery: 12 prospective targets are reconsidered to represent surface expressions of high-sulphidation epithermal and/or porphyry-style mineral systems based on the interpretation of processed ASTER and Sentinel-2 datasets and comparison to regional Geological Analogue deposits with comparable surface mineralisation (South to North):<ul style="list-style-type: none">Toro North;Toro Central;Toro South;Tambo VI;Lola;Malambo;Malambo 3;Malambo 4;Tambo South;Tambo V;Tambo North; &Tambo North 2.The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS



		<p>(2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geología y Minera (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.</p> <ul style="list-style-type: none"> Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geology associated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation. Follow-up on the ground exploration activities will be required to confirm the remote sensing interpretation of the geology. Summary information for drillholes 																																																																																											
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results, including a tabulation of the following information for all Material drill holes: Easting and northing of the drill hole collar Elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar Dip and azimuth of the hole Downhole length and interception depth Hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<table border="1"> <thead> <tr> <th>HoleID</th><th>Easting</th><th>Northing</th><th>Elevation</th><th>Azi</th><th>Dip</th><th>End Depth</th></tr> </thead> <tbody> <tr> <td>TMT-TSU-DDH-001</td><td>428637</td><td>6791490</td><td>4183</td><td>91</td><td>80</td><td>1028.6</td></tr> <tr> <td>TMT-TSU-DDH-002</td><td>428756</td><td>6791344</td><td>4077</td><td>89</td><td>70.3</td><td>1305</td></tr> <tr> <td>TMT-MAL-DDH-001</td><td>431839</td><td>6781700</td><td>3839</td><td>86.7</td><td>88.1</td><td>1166.0</td></tr> <tr> <td>TMT-MAL-DDH-002</td><td>432356</td><td>6781741</td><td>3647</td><td>260</td><td>65.1</td><td>631.5</td></tr> <tr> <td>TMT-TC-DDH-001</td><td>433243</td><td>6769859</td><td>3497</td><td>270</td><td>60</td><td>705.6</td></tr> </tbody> </table> <ul style="list-style-type: none"> Copper intervals are determined using a 0.1% Cu cut-off and an internal waste of up to 10 meters. Gold and molybdenum values are averaged over the same intervals as determined by the Cu intersections. <table border="1"> <thead> <tr> <th>Drillhole</th><th>From (m)</th><th>To (m)</th><th>Interval (m)</th><th>Cu (%)</th><th>Au (ppm)</th><th>Mo (ppm)</th></tr> </thead> <tbody> <tr> <td>TMT-TSU-DDH-001</td><td>102</td><td>132</td><td>30</td><td>0.13</td><td>0.04</td><td>69.1</td></tr> <tr> <td>TMT-TSU-DDH-001</td><td>168</td><td>184</td><td>16</td><td>0.11</td><td>0.04</td><td>14.6</td></tr> <tr> <td>TMT-TSU-DDH-001</td><td>898</td><td>1027</td><td>129</td><td>0.12</td><td>0.01</td><td>72.1</td></tr> <tr> <td>TMT-TSU-DDH-002</td><td>369</td><td>417</td><td>48</td><td>0.11</td><td>0.04</td><td>14.2</td></tr> <tr> <td>TMT-TSU-DDH-002</td><td>629</td><td>731</td><td>102</td><td>0.11</td><td>0.04</td><td>53.8</td></tr> <tr> <td>TMT-TSU-DDH-002</td><td>823</td><td>851</td><td>28</td><td>0.12</td><td>0.02</td><td>71.2</td></tr> </tbody> </table>	HoleID	Easting	Northing	Elevation	Azi	Dip	End Depth	TMT-TSU-DDH-001	428637	6791490	4183	91	80	1028.6	TMT-TSU-DDH-002	428756	6791344	4077	89	70.3	1305	TMT-MAL-DDH-001	431839	6781700	3839	86.7	88.1	1166.0	TMT-MAL-DDH-002	432356	6781741	3647	260	65.1	631.5	TMT-TC-DDH-001	433243	6769859	3497	270	60	705.6	Drillhole	From (m)	To (m)	Interval (m)	Cu (%)	Au (ppm)	Mo (ppm)	TMT-TSU-DDH-001	102	132	30	0.13	0.04	69.1	TMT-TSU-DDH-001	168	184	16	0.11	0.04	14.6	TMT-TSU-DDH-001	898	1027	129	0.12	0.01	72.1	TMT-TSU-DDH-002	369	417	48	0.11	0.04	14.2	TMT-TSU-DDH-002	629	731	102	0.11	0.04	53.8	TMT-TSU-DDH-002	823	851	28	0.12	0.02	71.2
HoleID	Easting	Northing	Elevation	Azi	Dip	End Depth																																																																																							
TMT-TSU-DDH-001	428637	6791490	4183	91	80	1028.6																																																																																							
TMT-TSU-DDH-002	428756	6791344	4077	89	70.3	1305																																																																																							
TMT-MAL-DDH-001	431839	6781700	3839	86.7	88.1	1166.0																																																																																							
TMT-MAL-DDH-002	432356	6781741	3647	260	65.1	631.5																																																																																							
TMT-TC-DDH-001	433243	6769859	3497	270	60	705.6																																																																																							
Drillhole	From (m)	To (m)	Interval (m)	Cu (%)	Au (ppm)	Mo (ppm)																																																																																							
TMT-TSU-DDH-001	102	132	30	0.13	0.04	69.1																																																																																							
TMT-TSU-DDH-001	168	184	16	0.11	0.04	14.6																																																																																							
TMT-TSU-DDH-001	898	1027	129	0.12	0.01	72.1																																																																																							
TMT-TSU-DDH-002	369	417	48	0.11	0.04	14.2																																																																																							
TMT-TSU-DDH-002	629	731	102	0.11	0.04	53.8																																																																																							
TMT-TSU-DDH-002	823	851	28	0.12	0.02	71.2																																																																																							
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. 	<ul style="list-style-type: none"> Significant intercepts for the TMT Project are calculated above a nominal cut-off grade of 0.1% Cu. Where gold and molybdenum values are reported, they were averaged over the same intervals as 																																																																																											



	<ul style="list-style-type: none"> Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<p>determined by the Cu intersections. Where appropriate, significant intersections may contain up to 10m down-hole distance of internal dilution (less than 0.1% Cu). Significant intersections are separated where internal dilution is greater than 10m down-hole distance.</p> <ul style="list-style-type: none"> Length weighted averages are used for any non-uniform intersection sample lengths. Length weighted average is (sum product of interval x corresponding interval assay grade), divided by sum of interval lengths and rounded to one decimal place. No top cuts have been considered in reporting of grade results, nor was it deemed necessary for the reporting of significant intersections.
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> True widths are not known for historical drilling All statistical information presented in ASX releases are inclusive of FieldDuplicates and assayed samples that have been allocated 1% of the lower detection limit, for any elements reported as below the detection limit. The relationship between mineralisation widths and drillhole intersections are currently being assessed using geological interpretations from current DD drilling. The current DD program including holes drilled across multiple orientations. Drill intersections are currently reported as downhole length.
<i>Diagrams</i>	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate maps and sections are displayed in the body of the ASX Release.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practised to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> NA
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> 'Interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regionalmagnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geología y Minera (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets. Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geologyassociated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation. Follow-up on the ground exploration activities is required to confirm the remote sensing interpretation of the geology and in particular confirm thedimensions of any surface expression of alteration and/or mineralisation. Field mapping has been completed on the Toro South and Toro North Targets;the field mapping is substantially complete for the Toro Central Target.



Further work <ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or, depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> The information on the drone survey conducted by DAMS is as follows: <ul style="list-style-type: none"> Sensor: <ul style="list-style-type: none"> Light Weight Potassium Magnetometer GEM GSMP-35U/25U GEMDAS Data Acquisition Module Cable for PixHawk integration Data Collection: <ul style="list-style-type: none"> Line Spacing: 100m Flight Line Azimuth: 90° Tie Line Azimuth: 0° Nominal Magnetic Sensor Altitude (AGL): 80m Terrain Following: Utilised SRTM data for terrain following to minimise topographic effects. Groundspeed: 3-6 m/s (dependent on terrain and environmental conditions) The information on the MT/IP survey conducted by Quantec is as follows: <ul style="list-style-type: none"> Survey specifications: <ul style="list-style-type: none"> Survey Type: TITAN DC/IP & MT Survey Station Interval: 100 m Dipole Size: 100 m IP Array: Pole-Dipole-Dipole MT Array: Tensor MT Inversion history: <ul style="list-style-type: none"> 2D IP Inversion UBC 2D IP (DC referenced) Inversion 3D IP Inversion UBC 3D IP Inversion LOKE 3D IP Inversion 3D DC Inversion UBC 3D DC Inversion LOKE 3D DC Inversion 3D MT Inversion MT 3D Ztot from 100 Ohm-m Half-Space model Plotting parameters <ul style="list-style-type: none"> Gridding Algorithm: Minimum Curvature Grid Cell Size: 10 metres Contours: Linear 2, 10 levels Colour Zoning: Linear or Log Linear (colour.tbl) Coordinate System: UTM Coordinate Datum / Projection: WGS84 / UTM zone 19 SH
--	---